Installation & Operating instructions for the MV FLUSH NP253-2



Remove the 1½" mounting nut

Mounting Flush Valve

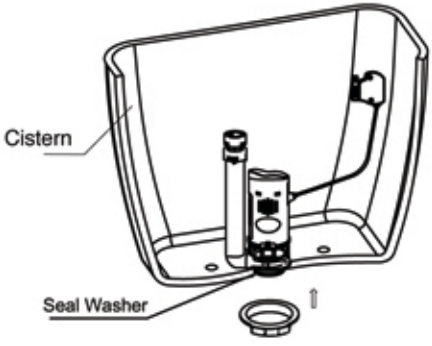

Install the Flush Valve with the seal washer into the outlet of the cistern.Adjust the orientation of the valve ensuring the cable and stricker box can reach the push button without inpediment then secure the valve to the cistern.

Dual Push Button

(NK317)

For flush mounting the button use the large nut to secure it. For Suface mounting the button use the chrome collar and small 15m nut provided. Rubber grommets are supplied for any misfitting spindles.

Mounting Push Button

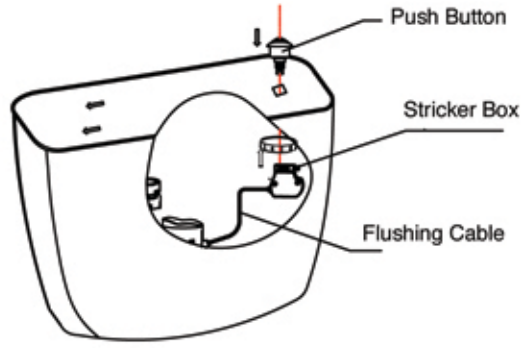

After mounting the push button on the cistern lid or wall, extend the button's spring loaded shaft by pressing in the button, then push the shaft fully into the stricker box upto the thread. Make sure there is no interference to the flushing cable with the flush valve or fill valve and that a correct flushing action is acheived. The Shaft can be removed from the Stricker box by depressind the release catch.

The MV Flush can bea adjusted to vari the amount of water in both short and longl flushes. Use the blue slider to vari the long flush, higher is less water. Use the Red slider to adjust the short flush, higher is less water